

LED Filament Decorative Lamps



2.5-7
watts

15,000
hours

up to
114
lpw

200-
800
lumens

Features

- LED lamp with the same vintage look and feel as traditional incandescent filament lamps
- 80% more efficient and 20x longer life than incandescent
- 320° omni-directional light source adds warm ambient glow to room décor
- 2200K amber and 2700K clear available in various decorative shapes
- Compatible with a wide array of leading edge TRIAC dimmers
- Suitable for use in damp locations
- Suitable for use in totally enclosed fixtures
- Contains no lead or mercury; RoHS compliant
- 3 year limited warranty

Top: A15; A19; A19 Silver Bowl; ST19
Middle: G16; G25; S14
Bottom: B11 E26; B11 E12; BA11 E12; T10; T6 E12; T6.5 E17



Performance

- 120VAC
- Available in warm 2200K and 2700K CCT
- 80+ CRI
- 15,000 hour life
- Dimmable down to 10% of full light output
- Not intended for use with emergency exits


Applications

- Chandeliers
- Accent/display lighting
- Sconces
- Lanterns
- Hospitality
- Residential
- Vanity mirrors



LED Filament Decorative Lamps

Dimensions

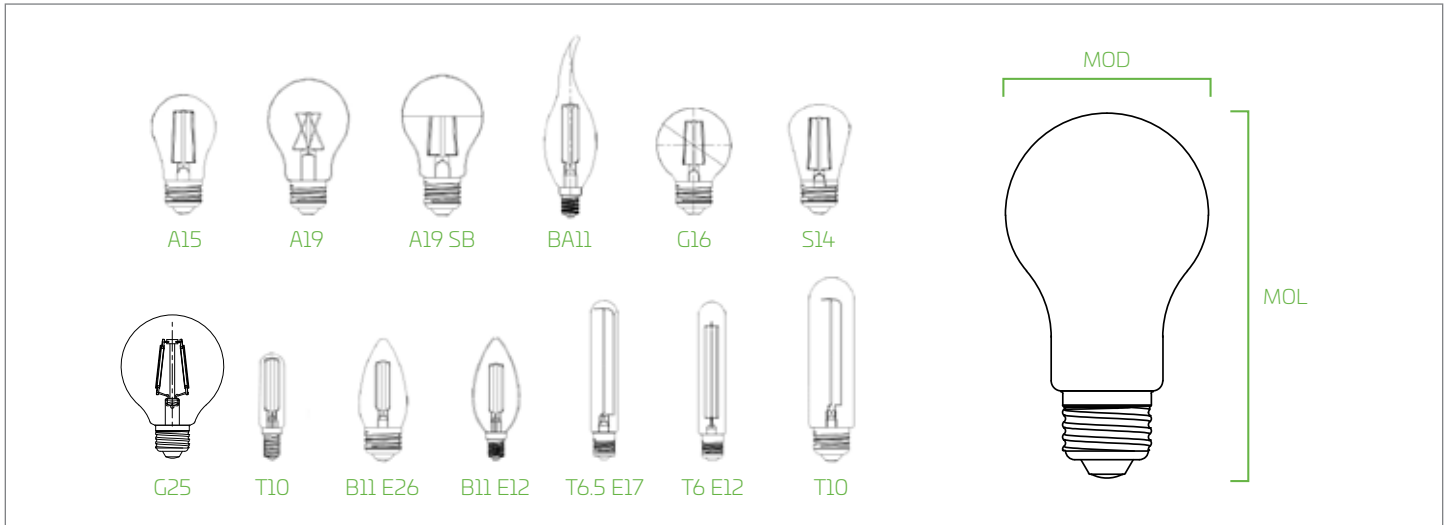

Ordering Information

Order Code	Item #	Lm	W	CCT	CRI	Volts	Shape	Base	MOL in/mm	MOD in/mm	Life/Hrs	ES
09855	LED4WA15/FIL/827-DIM-G7	300	4W	2700K	80+	120VAC	A15	E26	3.46/88	1.89/48	15,000	
09856	LED4.5WA15/FIL/827-DIM-G7	450	4.5W	2700K	80+	120VAC	A15	E26	3.46/88	1.89/48	15,000	
09871	LED4.5WA19/FIL/822-DIM-G7	350	4.5W	2200K	80+	120VAC	A19	E26	3.94/100	2.36/60	15,000	
09857	LED4.5WA19/FIL/SB/827-DIM-G7	400	4.5W	2700K	80+	120VAC	A19	E26	3.94/100	2.36/60	15,000	
09877	LED7WA19/FIL/827-DIM-G7	800	7W	2700K	80+	120VAC	A19	E26	4.13/105	2.36/60	15,000	★
09441	LED7WA19/FIL/SB/827K-DIM-G7	700	7W	2700K	80+	120VAC	A19	E26	3.94/100	2.36/60	15,000	
09858	LED2.5WB11E12/FIL/827-DIM-G7	200	2.5W	2700K	80+	120VAC	B11	E12	3.8/96.6	1.38/35	15,000	★
09892	LED4WB11E12/FIL/827-DIM-G7	300	4W	2700K	80+	120VAC	B11	E12	3.8/96.6	1.38/35	15,000	★
09859	LED4.5WB11E12/FIL/827-DIM-G7	500	4.5W	2700K	80+	120VAC	B11	E12	3.8/96.6	1.38/35	15,000	
09878	LED5WB11E26/FIL/827K-DIM-G7	500	5W	2700K	80+	120VAC	B11	E26	3.62/92	1.38/35	15,000	
09860	LED4WBA11E12/FIL/827-DIM-G7	400	4W	2700K	80+	120VAC	BA11	E12	4.84/123	1.38/35	15,000	
09861	LED4WG16/FIL/827-DIM-G7	350	4W	2700K	80+	120VAC	G16	E26	3.15/80	2.17/55	15,000	
09862	LED4.5WG16/FIL/827-DIM-G7	500	4.5W	2700K	80+	120VAC	G16	E26	3.15/80	2.17/55	15,000	
09875	LED4.5WG25/FIL/827-DIM-G7	470	4.5W	2700K	80+	120VAC	G25	E26			15,000	
09864	LED4WS14/FIL/827-DIM-G7	300	4W	2700K	80+	120VAC	S14	E26	3.19/81	1.77/45	15,000	
09863	LED4WS14/FIL/822-DIM-G7	250	4W	2200K	80+	120VAC	S14	E26	3.19/81	1.77/45	15,000	
09879	LED4WST19/FIL/822K-DIM-G7	400	4W	2200K	80+	120VAC	ST19	E26			15,000	
09869	LED2.5WT10/FIL/827-DIM-G7	250	2.5W	2700K	80+	120VAC	T10	E26	5.31/135	1.3/33	15,000	
09870	LED4WT10/FIL/827-DIM-G7	450	4W	2700K	80+	120VAC	T10	E26	5.31/135	1.3/33	15,000	
09865	LED2WT6E12/FIL/827-DIM-G7	120	2W	2700K	80+	120VAC	T6	E12	3.15/80	0.71/18	15,000	
09866	LED2.5WT6.5E17/FIL/827-DIM-G7	200	2.5W	2700K	80+	120VAC	T6.5	E17	4.65/118	0.79/20	15,000	
09867	LED4WT6.5E17/FIL/827-DIM-G7	300	4W	2700K	80+	120VAC	T6.5	E17	4.65/118	0.79/20	15,000	
09868	LED4.5WT6.5E17/FIL/827-DIM-G7	450	4.5W	2700K	80+	120VAC	T6.5	E17	4.65/118	0.79/20	15,000	

NOTE: Use order code when ordering.

★ ENERGY STAR[®] Approved

watch > like > follow



23220 W. 84th St, Shawnee, KS 66227 · (P) 1.800.852.2217 · (F) 1.800.492.8975
 Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 · (F) 1.888.705.1335

LED Filament Replacement Lamps								
Ordering Code	Watts	Shape	Base	Lumens	MOL	MOD	Rated Life	Approvals
LED7WA19/FIL/SB/827K-DIM-G7	7	A19	Medium Screw (E26)	700	3.94/100	2.36/60	15,000	cULus, FCC
LED2.5WB11E12/FIL/827-DIM-G7	2.5	B11	Candelabra Screw (E12)	200	3.80/96.6	1.38/35	15,000	cULus, Energy Star, FCC
LED2.5WT10/FIL/827-DIM-G7	2.5	T10	Medium Screw (E26)	250	5.31/135	1.30/33	15,000	cULus, FCC
LED2.5WT6.5E17/FIL/827-DIM-G7	2.5	T6-1/2	Intermediate Screw (E17)	200	4.65/118	0.79/20	15,000	cULus, FCC
LED2WT6E12/FIL/827-DIM-G7	2	T6	Candelabra Screw (E12)	120	3.15/80	0.71/18	15,000	cULus, FCC
LED4.5WA15/FIL/827-DIM-G7	4.5	A15	Medium Screw (E26)	450	3.46/88	1.89/48	15,000	cULus, FCC
LED4.5WA19/FIL/822-DIM-G7	4.5	A19	Medium Screw (E26)	350	3.94/100	2.36/60	15,000	cULus, FCC
LED4.5WB11E12/FIL/827-DIM-G7	4.5	B11	Candelabra Screw (E12)	500	3.80/96.6	1.38/35	15,000	cULus, FCC
LED4.5WT6.5E17/FIL/827-DIM-G7	4.5	T6-1/2	Intermediate Screw (E17)	450	4.65/118	0.79/20	15,000	cULus, FCC
LED4WA15/FIL/827-DIM-G7	4	A15	Medium Screw (E26)	300	3.46/88	1.89/48	15,000	cULus, FCC
LED4WB11E12/FIL/827-DIM-G7	4	B11	Candelabra Screw (E12)	300	3.80/96.6	1.38/35	15,000	cULus, Energy Star, FCC
LED4WBA11E12/FIL/827-DIM-G7	4	B11	Candelabra Screw (E12)	300	4.25/108	1.38/35	15,000	cULus, FCC
LED4WT10/FIL/827-DIM-G7	4	T10	Medium Screw (E26)	450	5.31/135	1.30/33	15,000	cULus, FCC
LED4WT6.5E17/FIL/827-DIM-G7	4	T6-1/2	Intermediate Screw (E17)	350	4.65/118	0.79/20	15,000	cULus, FCC
LED5WB11E26/FIL/827-DIM-G7	4.5	B11	Medium Screw (E26)	500	3.70/94	1.38/35	15,000	cULus, FCC
LED7WA19/FIL/827-DIM-G7	7	A19	Medium Screw (E26)	800	3.94/100	2.36/60	15,000	cULus, Energy Star, FCC
LED4WS14/FIL/827-DIM-G7	4	ST14	Medium Screw (E26)	300	3.25/82.5	1.88/45	15,000	cULus, FCC
LED4.5WG25/FIL/827-DIM-G7	4.5	G25	Medium Screw (E26)	470	4.60/116	4.60/116	15,000	cULus, FCC
LED4WST19/FIL/822-DIM-G7	4	ST19	Medium Screw (E26)	400	5.51/140	2.52/64	15,000	cULus, FCC

NOTES:
