

LED Filament Decorative Lamps



2.5-7
watts

15,000
hours

up to
114
lpw

200-
800
lumens

Features

- LED lamp with the same vintage look and feel as traditional incandescent filament lamps
- 80% more efficient and 20x longer life than incandescent
- 320° omni-directional light source adds warm ambient glow to room décor
- 2200K amber and 2700K clear available in various decorative shapes
- Compatible with a wide array of leading edge TRIAC dimmers
- Suitable for use in damp locations
- Suitable for use in totally enclosed fixtures
- Contains no lead or mercury; RoHS compliant
- 3 year limited warranty

Top: A15; A19; A19 Silver Bowl; ST19
Middle: G16; G25; S14
Bottom: B11 E26; B11 E12; BA11 E12; T10; T6 E12; T6.5 E17



Performance

- 120VAC
- Available in warm 2200K and 2700K CCT
- 80+ CRI
- 15,000 hour life
- Dimmable down to 10% of full light output
- Not intended for use with emergency exits


Applications

- Chandeliers
- Accent/display lighting
- Sconces
- Lanterns
- Hospitality
- Residential
- Vanity mirrors



LED Filament Decorative Lamps

Dimensions

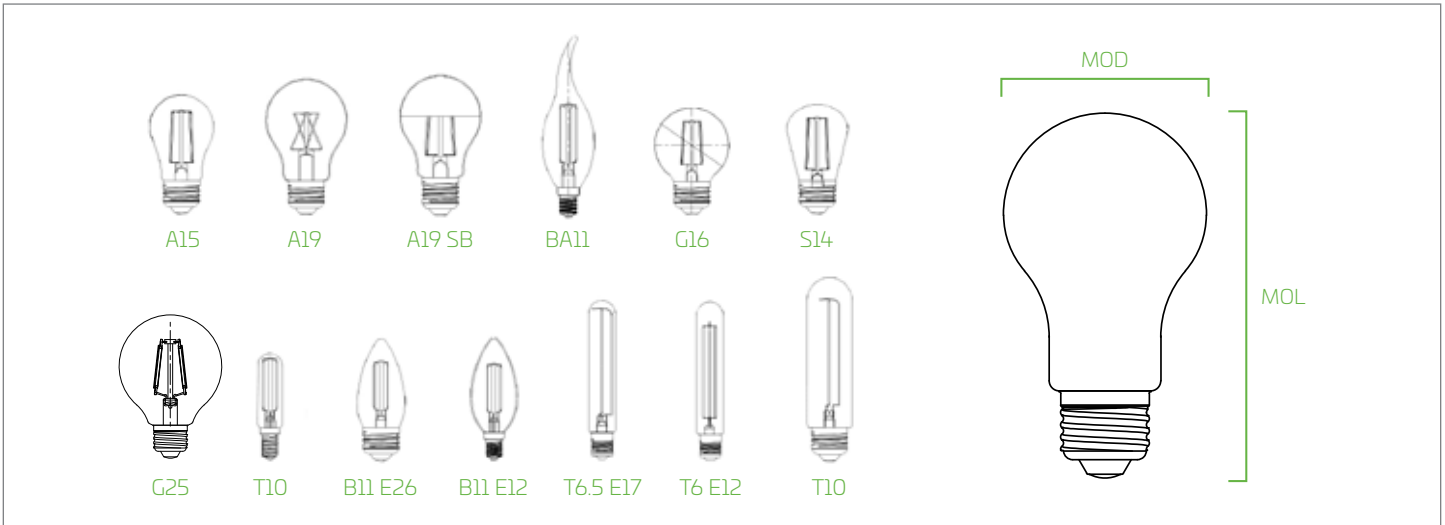

Ordering Information

| Order Code | Item # | Lm | W | CCT | CRI | Volts | Shape | Base | MOL in/mm | MOD in/mm | Life/Hrs | ES |
|------------|-------------------------------|-----|------|-------|-----|--------|-------|------|-----------|-----------|----------|----|
| 09855 | LED4WA15/FIL/827-DIM-G7 | 300 | 4W | 2700K | 80+ | 120VAC | A15 | E26 | 3.46/88 | 1.89/48 | 15,000 | |
| 09856 | LED4.5WA15/FIL/827-DIM-G7 | 450 | 4.5W | 2700K | 80+ | 120VAC | A15 | E26 | 3.46/88 | 1.89/48 | 15,000 | |
| 09871 | LED4.5WA19/FIL/822-DIM-G7 | 350 | 4.5W | 2200K | 80+ | 120VAC | A19 | E26 | 3.94/100 | 2.36/60 | 15,000 | |
| 09857 | LED4.5WA19/FIL/SB/827-DIM-G7 | 400 | 4.5W | 2700K | 80+ | 120VAC | A19 | E26 | 3.94/100 | 2.36/60 | 15,000 | |
| 09877 | LED7WA19/FIL/827-DIM-G7 | 800 | 7W | 2700K | 80+ | 120VAC | A19 | E26 | 4.13/105 | 2.36/60 | 15,000 | ★ |
| 09441 | LED7WA19/FIL/SB/827K-DIM-G7 | 700 | 7W | 2700K | 80+ | 120VAC | A19 | E26 | 3.94/100 | 2.36/60 | 15,000 | |
| 09858 | LED2.5WB11E12/FIL/827-DIM-G7 | 200 | 2.5W | 2700K | 80+ | 120VAC | B11 | E12 | 3.8/96.6 | 1.38/35 | 15,000 | ★ |
| 09892 | LED4WB11E12/FIL/827-DIM-G7 | 300 | 4W | 2700K | 80+ | 120VAC | B11 | E12 | 3.8/96.6 | 1.38/35 | 15,000 | ★ |
| 09859 | LED4.5WB11E12/FIL/827-DIM-G7 | 500 | 4.5W | 2700K | 80+ | 120VAC | B11 | E12 | 3.8/96.6 | 1.38/35 | 15,000 | |
| 09878 | LED5WB11E26/FIL/827K-DIM-G7 | 500 | 5W | 2700K | 80+ | 120VAC | B11 | E26 | 3.62/92 | 1.38/35 | 15,000 | |
| 09860 | LED4WBA11E12/FIL/827-DIM-G7 | 400 | 4W | 2700K | 80+ | 120VAC | BA11 | E12 | 4.84/123 | 1.38/35 | 15,000 | |
| 09861 | LED4WG16/FIL/827-DIM-G7 | 350 | 4W | 2700K | 80+ | 120VAC | G16 | E26 | 3.15/80 | 2.17/55 | 15,000 | |
| 09862 | LED4.5WG16/FIL/827-DIM-G7 | 500 | 4.5W | 2700K | 80+ | 120VAC | G16 | E26 | 3.15/80 | 2.17/55 | 15,000 | |
| 09875 | LED4.5WG25/FIL/827-DIM-G7 | 470 | 4.5W | 2700K | 80+ | 120VAC | G25 | E26 | | | 15,000 | |
| 09864 | LED4WS14/FIL/827-DIM-G7 | 300 | 4W | 2700K | 80+ | 120VAC | S14 | E26 | 3.19/81 | 1.77/45 | 15,000 | |
| 09863 | LED4WS14/FIL/822-DIM-G7 | 250 | 4W | 2200K | 80+ | 120VAC | S14 | E26 | 3.19/81 | 1.77/45 | 15,000 | |
| 09879 | LED4WST19/FIL/822K-DIM-G7 | 400 | 4W | 2200K | 80+ | 120VAC | ST19 | E26 | | | 15,000 | |
| 09869 | LED2.5WT10/FIL/827-DIM-G7 | 250 | 2.5W | 2700K | 80+ | 120VAC | T10 | E26 | 5.31/135 | 1.3/33 | 15,000 | |
| 09870 | LED4WT10/FIL/827-DIM-G7 | 450 | 4W | 2700K | 80+ | 120VAC | T10 | E26 | 5.31/135 | 1.3/33 | 15,000 | |
| 09865 | LED2WT6E12/FIL/827-DIM-G7 | 120 | 2W | 2700K | 80+ | 120VAC | T6 | E12 | 3.15/80 | 0.71/18 | 15,000 | |
| 09866 | LED2.5WT6.5E17/FIL/827-DIM-G7 | 200 | 2.5W | 2700K | 80+ | 120VAC | T6.5 | E17 | 4.65/118 | 0.79/20 | 15,000 | |
| 09867 | LED4WT6.5E17/FIL/827-DIM-G7 | 300 | 4W | 2700K | 80+ | 120VAC | T6.5 | E17 | 4.65/118 | 0.79/20 | 15,000 | |
| 09868 | LED4.5WT6.5E17/FIL/827-DIM-G7 | 450 | 4.5W | 2700K | 80+ | 120VAC | T6.5 | E17 | 4.65/118 | 0.79/20 | 15,000 | |

NOTE: Use order code when ordering.

★ ENERGY STAR[®] Approved

watch > like > follow



23220 W. 84th St, Shawnee, KS 66227 · (P) 1.800.852.2217 · (F) 1.800.492.8975
Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 · (F) 1.888.705.1335

| LED Filament Replacement Lamps | | | | | | | | |
|--------------------------------|-------|--------|--------------------------|--------|-----------|----------|------------|-------------------------|
| Ordering Code | Watts | Shape | Base | Lumens | MOL | MOD | Rated Life | Approvals |
| LED4WST19/FIL/822-DIM-G7 | 4 | ST19 | Medium Screw (E26) | 400 | 5.51/140 | 2.52/64 | 15,000 | cULus, FCC |
| LED6WG25/FIL/827K-DIM-G6 | 5.5 | G25 | Medium Screw (E26) | 400 | 4.41/112 | 3.15/80 | 15,000 | cULus |
| LED5WG40/FIL/822K-DIM-G6 | 5 | G40 | Medium Screw (E26) | 400 | 6.69/170 | 4.92/125 | 15,000 | cULus |
| LED7WA19/FIL/SB/827K-DIM-G7 | 7 | A19 | Medium Screw (E26) | 700 | 3.94/100 | 2.36/60 | 15,000 | cULus, FCC |
| LED2.5WB11E12/FIL/827-DIM-G7 | 2.5 | B11 | Candelabra Screw (E12) | 200 | 3.80/96.6 | 1.38/35 | 15,000 | cULus, Energy Star, FCC |
| LED2.5WT10/FIL/827-DIM-G7 | 2.5 | T10 | Medium Screw (E26) | 250 | 5.31/135 | 1.30/33 | 15,000 | cULus, FCC |
| LED2.5WT6.5E17/FIL/827-DIM-G7 | 2.5 | T6-1/2 | Intermediate Screw (E17) | 200 | 4.65/118 | 0.79/20 | 15,000 | cULus, FCC |
| LED2WT6E12/FIL/827-DIM-G7 | 2 | T6 | Candelabra Screw (E12) | 120 | 3.15/80 | 0.71/18 | 15,000 | cULus, FCC |
| LED4.5WA15/FIL/827-DIM-G7 | 4.5 | A15 | Medium Screw (E26) | 450 | 3.46/88 | 1.89/48 | 15,000 | cULus, FCC |
| LED4.5WA19/FIL/822-DIM-G7 | 4.5 | A19 | Medium Screw (E26) | 350 | 3.94/100 | 2.36/60 | 15,000 | cULus, FCC |
| LED4.5WB11E12/FIL/827-DIM-G7 | 4.5 | B11 | Candelabra Screw (E12) | 500 | 3.80/96.6 | 1.38/35 | 15,000 | cULus, FCC |
| LED4.5WG16/FIL/827-DIM-G7 | 4.5 | G16 | Medium Screw (E26) | 500 | 3.15/80 | 2.17/55 | 15,000 | cULus, FCC |
| LED4.5WT6.5E17/FIL/827-DIM-G7 | 4.5 | T6-1/2 | Intermediate Screw (E17) | 450 | 4.65/118 | 0.79/20 | 15,000 | cULus, FCC |
| LED4WA15/FIL/827-DIM-G7 | 4 | A15 | Medium Screw (E26) | 300 | 3.46/88 | 1.89/48 | 15,000 | cULus, FCC |
| LED4WB11E12/FIL/827-DIM-G7 | 4 | B11 | Candelabra Screw (E12) | 300 | 3.80/96.6 | 1.38/35 | 15,000 | cULus, Energy Star, FCC |
| LED4WBA11E12/FIL/827-DIM-G7 | 4 | B11 | Candelabra Screw (E12) | 300 | 4.25/108 | 1.38/35 | 15,000 | cULus, FCC |
| LED4WS14/FIL/822-DIM-G7 | 4 | ST14 | Medium Screw (E26) | 250 | 3.25/82.5 | 1.88/45 | 15,000 | cULus, FCC |
| LED4WT10/FIL/827-DIM-G7 | 4 | T10 | Medium Screw (E26) | 450 | 5.31/135 | 1.30/33 | 15,000 | cULus, FCC |
| LED4WT6.5E17/FIL/827-DIM-G7 | 4 | T6-1/2 | Intermediate Screw (E17) | 350 | 4.65/118 | 0.79/20 | 15,000 | cULus, FCC |
| LED5WB11E26/FIL/827-DIM-G7 | 4.5 | B11 | Medium Screw (E26) | 500 | 3.70/94 | 1.38/35 | 15,000 | cULus, FCC |
| LED7WA19/FIL/827-DIM-G7 | 7 | A19 | Medium Screw (E26) | 800 | 3.94/100 | 2.36/60 | 15,000 | cULus, Energy Star, FCC |
| LED4WS14/FIL/827-DIM-G7 | 4 | ST14 | Medium Screw (E26) | 300 | 3.25/82.5 | 1.88/45 | 15,000 | cULus, FCC |
| LED4.5WG25/FIL/827-DIM-G7 | 4.5 | G25 | Medium Screw (E26) | 470 | 4.60/116 | 4.60/116 | 15,000 | cULus, FCC |

NOTES:
