


ANSI CODED LAMPS

AV • Photographic • Stage/Studio • Television



- **Wide Selection**
Consolidate your sources with the most comprehensive selection in the industry
- **Direct OE Replacement**
Meets or exceeds OE specifications
- **Attractive Packaging**
Visually appealing and informative packaging encourages purchase

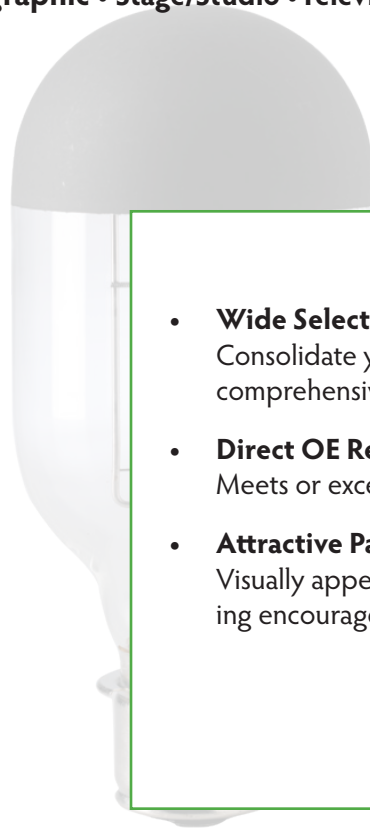

EiKO 
CERTIFIED GREEN

Selection. Solutions. Simplicity.

23220 W. 84th St., Shawnee, KS 66227 • Ph: 1.800.852.2217 • Fax: 1.913.441.6679 • Email: eiko@eiko.com
EiKO CANADA: 81 King Street, Barrie, ON L4N 6B5, Canada • Ph: 705-721-5189 • Fax: 705-721-7855

www.eiko.com

ANSI Coded Lamps								
Ordering Code	Watts	Shape	Base	Filament	Lumens	MOL	MOD	Rated Life
ENX	360	MR16	GX5.3	CC-8		1.75/44.5	2.00/50.8	75
DDL	150	MR16	GX5.3	C-8		1.75/44.5	2.00/50.8	500
EJA	150	MR16	GX5.3	CC-6		1.75/44.5	2.00/50.8	40
EKE	150	MR16	GX5.3	CC-6		1.75/44.5	2.00/50.8	200
EJM	150	MR16	GX5.3	CC-6		1.75/44.5	2.00/50.8	40
EKZ	30	MR16	GX5.3	CC-6		1.75/44.5	2.00/50.8	200
ELC	250	MR16	GX5.3	CC-6		1.75/44.5	2.00/50.8	50
EJV	150	MR16	GX5.3	CC-6		1.75/44.5	2.00/50.8	40
EPN	35	MR16	GX5.3	C-6		1.75/44.5	2.00/50.8	50
FHS	300	MR13	GX5.3	CC-8		1.75/44.5	1.66/42.1	70
BLC	30	S11	Double Contact Bayonet (BA15d)	CC-2V	400	2.38/60.3	1.40/35.5	50
BNF	75	S11	Double Contact Bayonet (BA15d)	CC-2V	1300	2.38/60.3	1.40/35.5	25
ESS	250	T4	Double Contact Bayonet (BA15d)	CC-8	5000	3.15/80.0	0.55/14.0	2,000
ETB	250	T4	Double Contact Bayonet (BA15d)	CC-8	4700	3.15/80.0	0.55/14.0	2,000
EYX	500	T4	Miniature Candelabra Screw (E11)	CC-8	10000	3.75/95.3	0.52/13.0	2,000
EHT	250	T4	Miniature Candelabra Screw (E11)	CC-8	5000	3.15/80.0	0.52/13.0	2,000
EVR	500	T4	Miniature Candelabra Screw (E11)	CC-8	10000	3.75/95.3	0.55/14.0	2,000
EYB	360	T3-1/2	G5.3	CC-8	10000	2.25/57.2	0.46/11.5	75
ENH	250	MR16	GX5.3	CC-8	15000	1.75/44.5	2.00/50.8	175
ELH	300	MR16	GX5.3	CC-8		1.75/44.5	2.00/50.8	35
EGT	1000	T7	Medium Bi-Post (G22)	C-13D	27500	5.50/139.7	0.91/23.0	200
BTL	500	T6	Medium Prefocus Flanged Single Contact (P28s)	C-13D	11000	5.00/127.0	0.77/19.5	500
BTN	750	T7	Medium Prefocus Flanged Single Contact (P28s)	C-13D	17000	5.00/127.0	0.91/23.0	500
BTR	1000	T7	Medium Prefocus Flanged Single Contact (P28s)	C-13D	27500	5.00/127.0	0.91/23.0	200
Q150T4/CL/25	150	T4	Recessed Single Contact (R7s)	C-8	2700	2.48/63.0	0.52/13.0	3,000
FEL	1000	T6	G9.5	CC-8	27000	4.00/101.6	0.77/19.5	300
FLK	575	T6	G9.5	CC-8	16500	3.97/100.8	0.75/19.1	300
EHG	750	T5	G9.5	CC-8	15000	4.12/104.8	0.73/18.5	2,000
PH/140	75	S14	Medium Screw (E26)	CC-2V	1150	3.38/86.0	1.73/44.0	50
BBA	250	A21	Medium Screw (E26)	C-9	8500	4.77/121.2	2.68/68.0	3
ECA	250	A23	Medium Screw (E26)	C-9	6500	5.52/140.2	2.76/70.0	20
ECT	500	PS25	Medium Screw (E26)	C-9	13650	6.10/155	3.15/80.0	60
EBW	500	PS25	Medium Screw (E26)	C-9	10500	6.10/155	3.15/80.0	6
BCA	250	A21	Medium Screw (E26)	C-9	5000	4.94/125.4	2.68/68.0	3
FFS	1000	PAR64	Mogul End Prong (GX16d)	CC-6	19000	6.03/153.1	8.35/212.0	800
HPL575/115V	575	T6	G9.5 w/ Heatsink	4-C8	16520	3.86/98	0.72/18.4	300
HPL575LL/115V	575	T6	G9.5 w/ Heatsink	4-C8	12360	3.86/98	0.72/18.4	2,000
HPL550LL/77V	550	T6	G9.5 w/ Heatsink	4-C8	12160	3.86/98	0.72/18.4	2,000
DYS/DYV/BHC	600	G7	GZ9.5	CC-6	17000	2.50/63.5	0.87/22.0	75

NOTES:
