

T8 TUBE LIGHTS : SIGN TUBES

DESCRIPTION

LED Sign Tubes provide exceptional performance with reduced energy and maintenance costs.

FEATURES

- Wide 330° beam spread
- Built-in universal line voltage driver

WARRANTY

- 5 year limited warranty; see eiko.com for warranty details

APPLICATIONS

- Signs
- Retrofits
- Light Boxes
- Backlighting
- Commercial
- Retail




	18W	24W	30W	36W	
PERFORMANCE	Power Consumption	18W	24W	30W	36W
	Lumens	2,200	2,900	4,200	4,600
	Efficacy (LPW)	122	121	140	128
	CRI	80+			
	Beam	330°			
	CCT	4000K; 6500K			
	Life (L70)	50,000 hours			
ELECTRICAL	Power Factor	≥0.9			
	THD	>20%			
	Input Voltage	120-277VAC			
CONSTRUCTION	Operating Temperature	-22°F to 113°F (-30°C to +45°C)			
	Base	R17d			
LISTINGS	Certification(s)	cULus Classified; FCC			
	Material Usage	RoHS Compliant; no mercury			
	Environment	IP20			

PERFORMANCE SUMMARY

Order Code	Item #	Length	Lumens	Watts	LPW	CCT	CRI	Volts	Life/Hours
10478	LED18WT8/48/840-DS-G8	4'	2,200	18W	122	4000K	80+	120-277V	50,000
10479	LED18WT8/48/865-DS-G8	4'	2,200	18W	122	6500K	80+	120-277V	50,000
10480	LED24WT8/60/840-DS-G8	5'	2,900	24W	121	4000K	80+	120-277V	50,000
10481	LED24WT8/60/865-DS-G8	5'	2,900	24W	121	6500K	80+	120-277V	50,000
10482	LED30WT8/72/840-DS-G8	6'	4,200	30W	140	4000K	80+	120-277V	50,000
10483	LED30WT8/72/865-DS-G8	6'	4,200	30W	140	6500K	80+	120-277V	50,000
10484	LED36WT8/96/840-DS-G8	8'	4,600	36W	128	4000K	80+	120-277V	50,000
10485	LED36WT8/96/865-DS-G8	8'	4,600	36W	128	6500K	80+	120-277V	50,000

DIMENSIONS

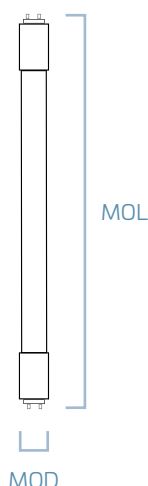

The diagram shows a vertical LED strip light with two rectangular modules at the top and bottom. A vertical dimension line on the right side is labeled 'MOL' and spans the length of the strip. A horizontal dimension line at the bottom is labeled 'MOD' and spans the width of one module.

Size	MOL	MOD
4'	45.79"/1166.1mm	1.10"/28mm
5'	57.91"/1470.9mm	1.10"/28mm
6'	69.91"/1775.7mm	1.10"/28mm
8'	93.91"/2385.3mm	1.10"/28mm