



LED PL : DIRECT REPLACEMENT LAMPS

DESCRIPTION

LED PL Replacement Lamps directly replace fluorescent PL lamps at a fraction of the energy cost.

FEATURES


- 2-pin directly replaces 13, 18, 26W quad-tube and 4-pin directly replaces 26, 32, 42W quad- and triple-tube PL fluorescent lamps
- Available in two ergonomically crafted models: horizontal (with rotatable base) or vertical orientation
- Plug-and-Play installation for 2-pin magnetic ballast model or 4 pin electronic ballast compatible model
- Instant-on with no warmup, unlike compact fluorescent
- Shatter resistant for reduced risk of injury and breakage
- Input voltage driven by installed PL electric/magnetic ballast
- Consumes 1/3 the energy and lasts 5x longer than 26 watt compact fluorescent
- Suitable for use in totally enclosed recessed fixtures
- Non-dimmable
- **Not compatible with all ballasts. See eiko.com for list of tested ballasts**

WARRANTY

- 5 year limited warranty; see eiko.com for warranty details

APPLICATIONS

- Commercial/Residential
- Hotel/Hospitality
- Education
- Healthcare
- Retail
- Property Management

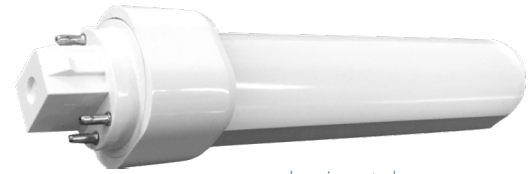

horizontal



vertical



PERFORMANCE	Power Consumption	9W
	Lumens	850/900
	Efficacy (LPW)	94/100
	CRI	80+
	Beam	120°
	CCT	2700K, 3000K, 3500K, 4000K
	Life (L70)	50,000 hours
ELECTRICAL	Power Factor	≥0.9
	THD	<20%
	Input Voltage	120-277V
CONSTRUCTION	Base	G24d-1, G24d-2, G24d-3, G24q-3, GX24q-3, GX24q-4
LISTINGS	Certification(s)	DesignLights Consortium® Qualified; cULus Classified
	Material Usage	RoHS Compliant; no mercury or lead
	Environment	UL/cUL Classified for damp locations

PERFORMANCE SUMMARY

2-PIN MAGNETIC BALLAST COMPATIBLE / NON-DIMMABLE:*

Order Code	Item #	Lumens	Watts	CCT	CRI	MOL	Orientation	Base	Life/Hours	Replaces Fluor
09332	LED9W2PH/827DR-G6	850	9W	2700K	80+	5.39"	Horizontal	G24d-1, G24d-2, G24d-3	50K	26W 2-pin quad
09250	LED9W2PH/830DR-G6	850	9W	3000K	80+	5.39"	Horizontal	G24d-1, G24d-2, G24d-3	50K	26W 2-pin quad
09251	LED9W2PH/835DR-G6	850	9W	3500K	80+	5.39"	Horizontal	G24d-1, G24d-2, G24d-3	50K	26W 2-pin quad
09252	LED9W2PH/840DR-G6	900	9W	4000K	80+	5.39"	Horizontal	G24d-1, G24d-2, G24d-3	50K	26W 2-pin quad
09334	LED9W2PV/827DR-G6	850	9W	2700K	80+	4.57"	Vertical	G24d-1, G24d-2, G24d-3	50K	13/18/26W 2-pin quad
09253	LED9W2PV/830DR-G6	850	9W	3000K	80+	4.57"	Vertical	G24d-1, G24d-2, G24d-3	50K	13/18/26W 2-pin quad
09254	LED9W2PV/835DR-G6	850	9W	3500K	80+	4.57"	Vertical	G24d-1, G24d-2, G24d-3	50K	13/18/26W 2-pin quad
09255	LED9W2PV/840DR-G6	900	9W	4000K	80+	4.57"	Vertical	G24d-1, G24d-2, G24d-3	50K	13/18/26W 2-pin quad

NOTE: Use order code when ordering. Visit eiko.com for complete ballast compatibility information. *Not for use with emergency ballasts.

4-PIN ELECTRONIC BALLAST COMPATIBLE / NON-DIMMABLE:*

Order Code	Item #	Lumens	Watts	CCT	CRI	MOL	Orientation	Base	Life/Hours	Replaces Fluor	DLC
09331	LED9W4PH/827DR-G6	9W	850	2700K	80+	6.57"	Horizontal	G24q-3, GX24q-3, GX24q-4	50K	26/32/42W 4-pin quad & triple	
09244	LED9W4PH/830DR-G6	9W	850	3000K	80+	6.57"	Horizontal	G24q-3, GX24q-3, GX24q-4	50K	26/32/42W 4-pin quad & triple	✓
09245	LED9W4PH/835DR-G6	9W	850	3500K	80+	6.57"	Horizontal	G24q-3, GX24q-3, GX24q-4	50K	26/32/42W 4-pin quad & triple	✓
09246	LED9W4PH/840DR-G6	9W	900	4000K	80+	6.57"	Horizontal	G24q-3, GX24q-3, GX24q-4	50K	26/32/42W 4-pin quad & triple	✓
09333	LED9W4PV/827DR-G6	9W	850	2700K	80+	4.57"	Vertical	G24q-3, GX24q-3, GX24q-4	50K	26/32/42W 4-pin quad & triple	
09247	LED9W4PV/830DR-G6	9W	850	3000K	80+	4.57"	Vertical	G24q-3, GX24q-3, GX24q-4	50K	26/32/42W 4-pin quad & triple	✓
09248	LED9W4PV/835DR-G6	9W	850	3500K	80+	4.57"	Vertical	G24q-3, GX24q-3, GX24q-4	50K	26/32/42W 4-pin quad & triple	✓
09249	LED9W4PV/840DR-G6	9W	900	4000K	80+	4.57"	Vertical	G24q-3, GX24q-3, GX24q-4	50K	26/32/42W 4-pin quad & triple	✓

NOTE: Use order code when ordering. Visit eiko.com for complete ballast compatibility information. *Not for use with emergency ballasts. ✓DesignLights Consortium® Qualified

DIMENSIONS

