



GLASS : LED WALLPACK

DESCRIPTION

A rugged, economical, dimmable glass wallpack for general purpose outdoor lighting.

FEATURES

- 0-10V dimming standard
- UV stabilized powder-coated bronze finish
- Enclosure and hardware are corrosion resistant

LISTINGS

- UL Listed for wet locations
- IP65 Rated
- DesignLights Consortium® Premium Qualified - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance

LED CHARACTERISTICS

- Rated lifetime L70: 50,000 hours
- 4000K, 5000K CCT
- CRI: >80

ELECTRICAL

- Input voltage: 120-277V; 277-480V
- Power Factor: >0.9
- THD: <20%

THERMAL

- -40°F to 104°F (-40°C to 40°C) operating temperature

CONSTRUCTION

- Borosilicate glass lens for optical precision

WARRANTY

- 5 year limited warranty. Additional warranty options available. See eiko.com for details

project name	type
catalog number	
comments	voltage
approved by	date

30W



40/50/60/80W



120W



APPLICATIONS

- Industrial Parks
- Loading Docks
- Utility Sheds
- Entryways
- Walkways
- Storage Areas
- Security



ORDERING INFORMATION

EXAMPLE: WPS-420-30W-840-UD-BZ

Model	Lumens	Watts	CRI/CCT	Voltage	Dimming	Finish	
WPS : LED Glass Wallpack	420 - 4,200 lm	30W - 30W	840 - 80 CRI; 4000K	U - 120-277V	D - 0-10V Dimming	BZ - Bronze	
	426 - 4,260 lm		850 - 80 CRI; 5000K				
	700 - 7,000 lm	50W - 50W	840 - 80 CRI; 4000K				
	710 - 7,100 lm		850 - 80 CRI; 5000K				
	840 - 8,400 lm	60W - 60W	840 - 80 CRI; 4000K				
	852 - 8,520 lm		850 - 80 CRI; 5000K				
	1120 - 11,200 lm	80W - 80W	840 - 80 CRI; 4000K				
	1136 - 11,360 lm		850 - 80 CRI; 5000K				
	1680 - 16,800 lm	120W - 120W	840 - 80 CRI; 4000K				
	1704 - 17,040 lm		850 - 80 CRI; 5000K				
	1120 - 11,200 lm	80W - 80W	840 - 80 CRI; 4000K				V - 277-480V
	1136 - 11,360 lm		850 - 80 CRI; 5000K				


PERFORMANCE SUMMARY

Order Code	Item #	Watts	Lumens	CCT	CRI	Volts	Dimming	DLC
11246	WPS-420-30W-840-UD-BZ	30W	4,200	4000K	>80	120-277V	0-10V	✓
11247	WPS-426-30W-850-UD-BZ	30W	4,260	5000K	>80	120-277V	0-10V	✓
11248	WPS-700-50W-840-UD-BZ	50W	7,000	4000K	>80	120-277V	0-10V	✓
11249	WPS-710-50W-850-UD-BZ	50W	7,100	5000K	>80	120-277V	0-10V	✓
11250	WPS-840-60W-840-UD-BZ	60W	8,400	4000K	>80	120-277V	0-10V	✓
11251	WPS-852-60W-850-UD-BZ	60W	8,520	5000K	>80	120-277V	0-10V	✓
11252	WPS-1120-80W-840-UD-BZ	80W	11,200	4000K	>80	120-277V	0-10V	✓
11253	WPS-1136-80W-850-UD-BZ	80W	11,360	5000K	>80	120-277V	0-10V	✓
11254	WPS-1680-120W-840-UD-BZ	120W	16,800	4000K	>80	120-277V	0-10V	✓
11255	WPS-1704-120W-850-UD-BZ	120W	17,040	5000K	>80	120-277V	0-10V	✓
11260	WPS-1120-80W-840-VD-BZ	80W	11,200	4000K	>80	277-480V	0-10V	✓
11261	WPS-1136-80W-850-VD-BZ	80W	11,360	5000K	>80	277-480V	0-10V	✓


ACCESSORIES

Order Code	Item #	Description
09966	PC1-4036-U	Photocell, Flush Mount, 120-277V
09967	PC1-4136-U	Photocell, Stem Mount, Side Lens, 120-277V
09968	PC1-4236-U	Photocell, Stem Swivel Mount, Side Lens, 120-277V
09969	PC1-4736-U	Photocell, Stem Swivel Mount, Top Lens, 120-277V


DIMENSIONS

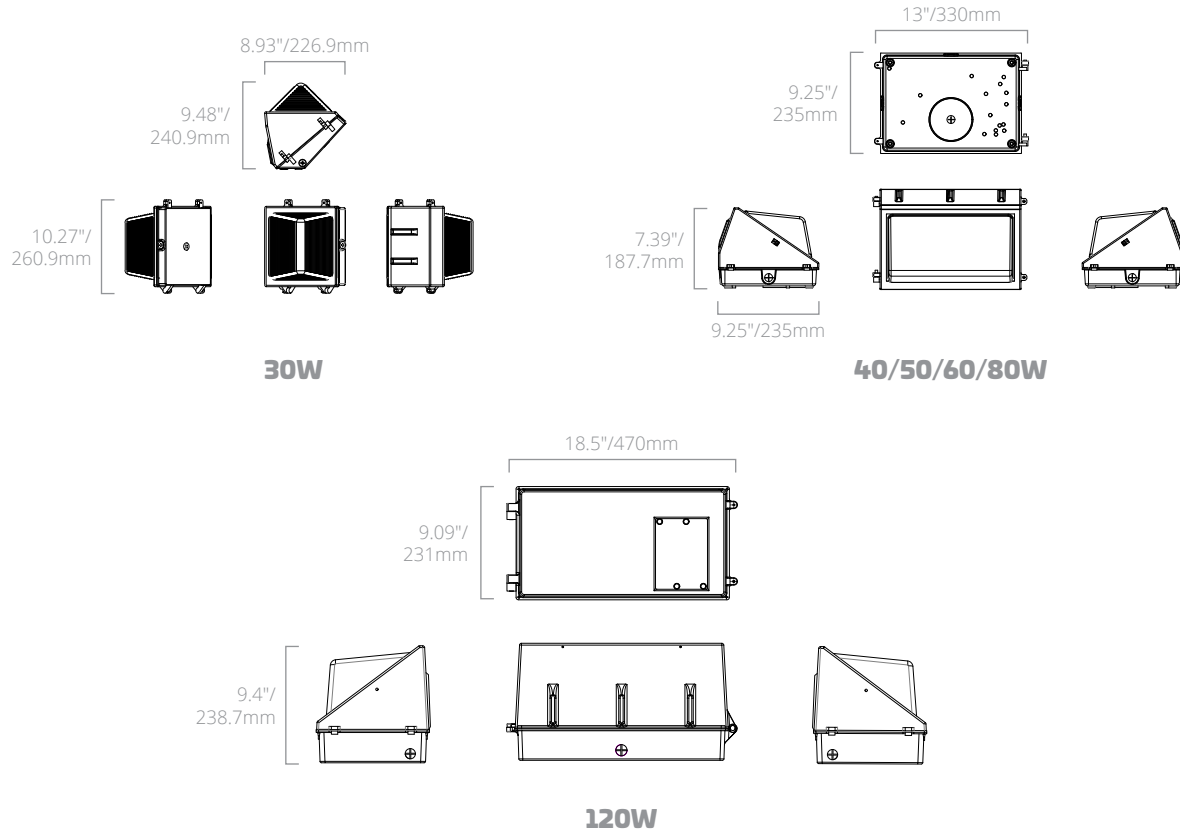


PHOTOMETRICS

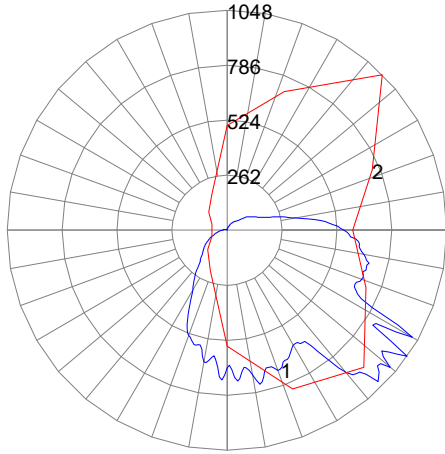


WMG-1C

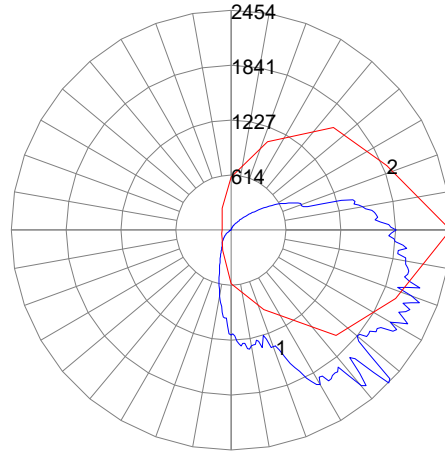


WMG-2C

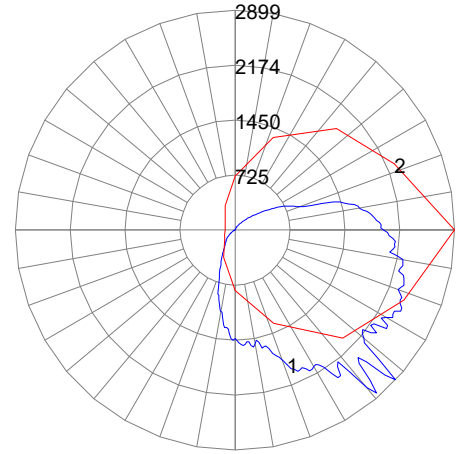

WMG-3C

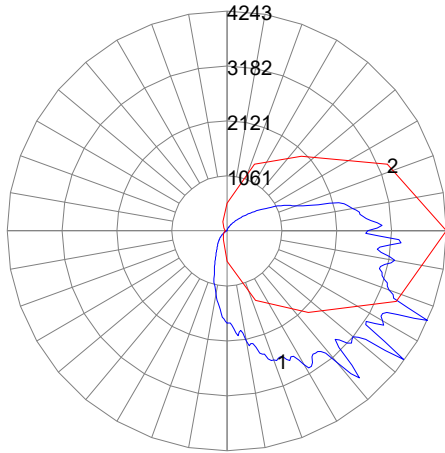

WMG-4C

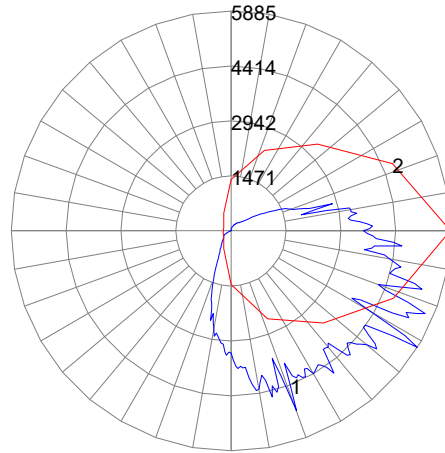

WMG-5C